




Indoor P2.6,P3.9
Outdoor P3.9,P4.8
500x500mm or 500x1000mm





Indoor & Outdoor LED Display for Pro AV rental

Living Broadcasting / AV Production / TV Studio / Events

R1 highlights

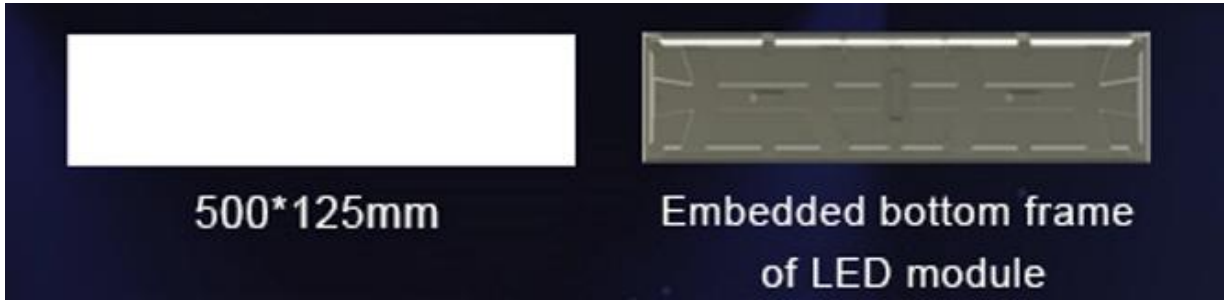


Module size 500*125mm, **bright/dark line in vertical** reduced 100% compare with 250x250mm, The embedded module frame design can protect the LED module during repeat rental job

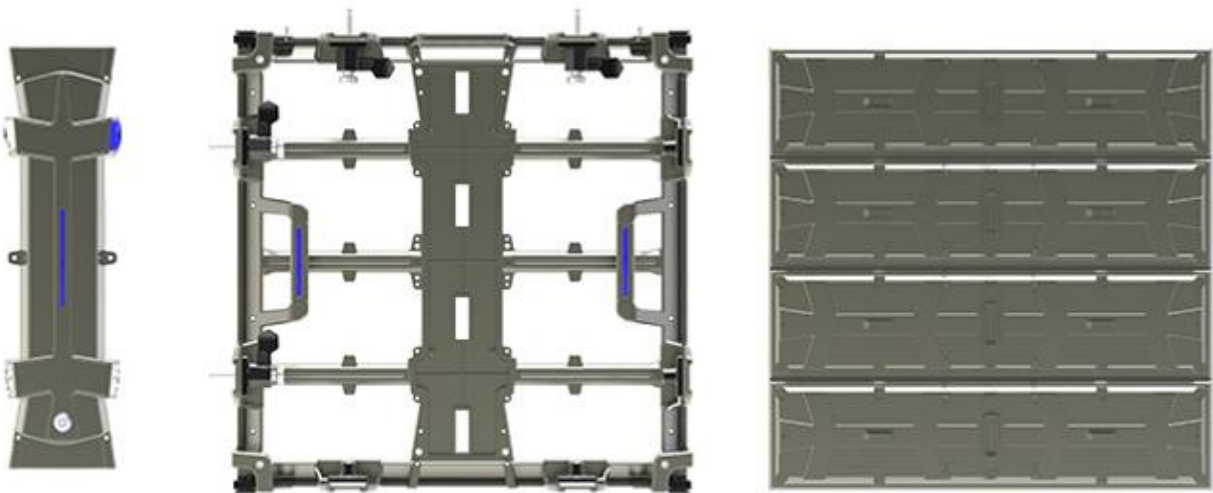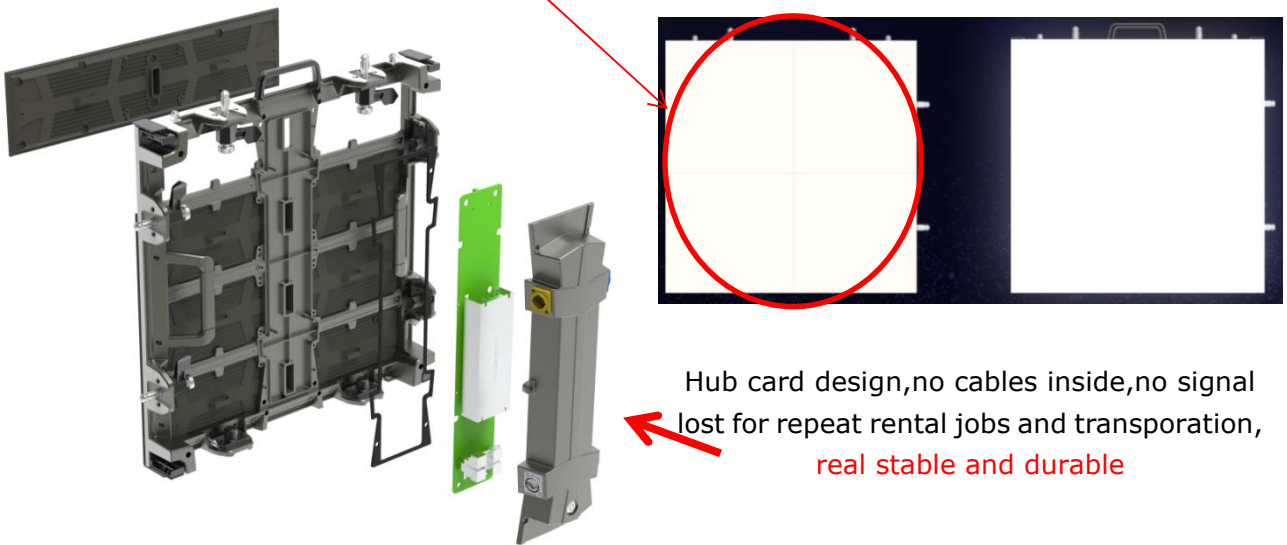


Independent system box + magnetic pole design, real fast replace in onsite
Even if replace the LED module, no need take off the system box, **real friendly usage**
System box+cabinet frame+LED Module = a complete product, good choice for rental

Mark: *indoor version support F/R maintenance, outdoor version support Rear maintenance only*

***Optional functions**
Transfer Beam design

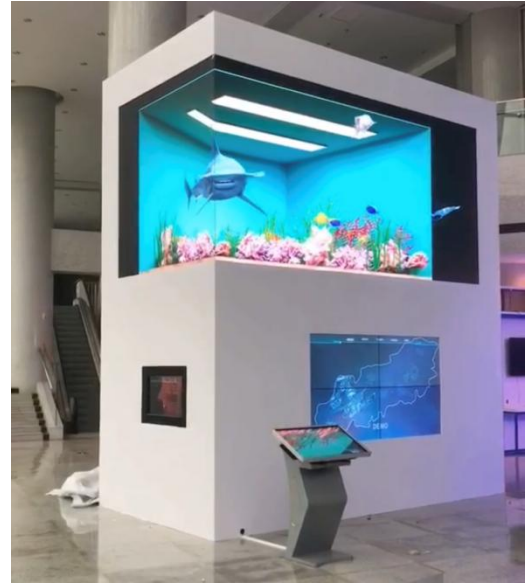

90 degree do naked eye 3D effect

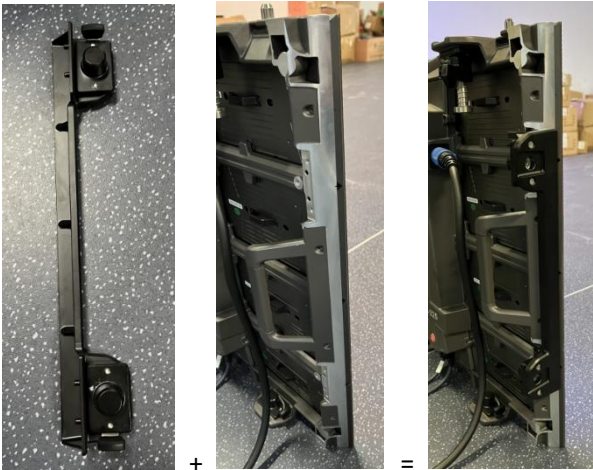


Transfer beam

Currently Situation in rental market: 

99% vendors make 45 degree cabinet just for right-angle LED wall, the same cabinet can't build a flat LED wall, or very difficult for rental companies, this cabinet using rate too low, waste money.

in StrongerTek, we have a great solution to solve it---we special designed a **Transfer Beam**, the 45 degree cabinet can build a flat LED wall easy, one cabinet match with various tasks

***Optional functions**
Convex/Concave

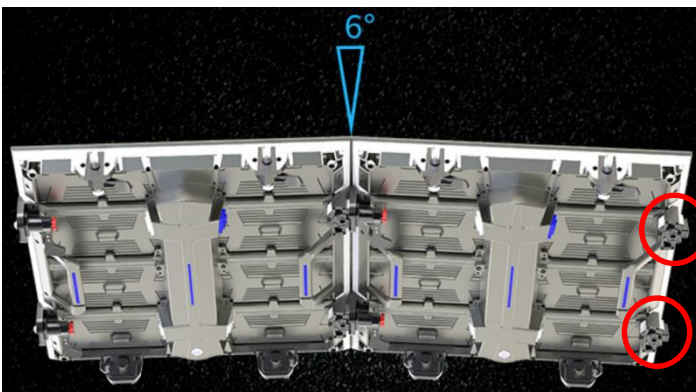

STR1 Rental screen Specification

standard configuration: *Nationstar black body+3840Hz*

Item	R1 Series Indoor/Outdoor LED for Pro AV rental				
Pixel Pitch	2.6 indoor	2.9 indoor	3.9 indoor	3.9 outdoor	4.8 outdoor
LED per pixel	SMD1515	SMD1515	SMD2121	SMD1921	SMD1921
Pixel Density(per sqm)	147456	112896	65536	65536	43264
Module Dimension(WxH)	500x125mm	500x125mm	500x125mm	500x125mm	500x125mm
Module Resolution	192x48	168x42	128x32	128x32	104x26
Scan Rate	1/24	1/21	1/16	1/16	1/13
Cabinet Dimension(WxHxD)	500x500x650mm	500x500x650mm	500x500x650mm	500x500x650mm	500x500x650mm
Cabinet Resolution(500mm)	192x192	168x168	128x128	128x128	104x104
Cabinet Dimension(WxHxD)	500x1000x650mm	500x1000x650mm	500x1000x650mm	500x1000x650mm	500x1000x650mm
Cabinet Resolution(1000mm)	192x384	168x336	128x256	128x256	104x208
Best View Distancing	>2m	>2m	>3m	>3m	>4m
Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Viewing Angle(H/V)	160°/140°	160°/140°	160°/140°	160°/140°	160°/140°
Cabinet Material	Die-casting	Die-casting	Die-casting	Die-casting	Die-casting
Curve(options)	+/-3/6°	+/-3/6°	+/-3/6°	+/-3/6°	+/-3/6°
45°(options)	Transfer Beam	Transfer Beam	Transfer Beam	Transfer Beam	Transfer Beam
Maintenance	Front/Rear	Front/Rear	Front/Rear	Rear	Rear
Single Cabinet Weight	6.5kgs/13kgs	6.5kgs/13kgs	6.5kgs/13kgs	6.5kgs/13kgs	6.5kgs/13kgs
Brightness	1000nits	1000nits	1000nits	3500-4000nits	3500-4000nits
Max Power Consumption	480w	480w	480w	350w	350w
Avg Power Consumption	240w	240w	240w	700w	700w
Ingress Protection	IP30	IP30	IP30	IP65(F) / IP54(R)	IP65(F) / IP54(R)
Lifetime(Hrs)	100,000	100,000	100,000	100,000	100,000
Working Temperature	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°
Storage Temp/Humidity	-40°/60°; 10%-60%RH				

*product spec are for reference only,the final interpretation right of product is reserved by HolILED

Indoor LED Display
Outdoor LED Display
Customized LED Display
LED for rental using
LED for fix installation

Follow Us



WEBSITE



YOUTUBE



FACEBOOK

SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add: 502A, T2 Building, HiPark, Shiyan, Bao'an, Shenzhen, China

<http://www.holiled.com>

sales@holiled.com
sales01@holiled.com
sales02@holiled.com
sales03@holiled.com
support@holiled.com