



Indoor P1.25, P1.56, P1.87 LED Module Size: 300x168.75mm 600X337.5mm (WxH)




Small Pitch UHD indoor LED Display

For Airport/Control Room/Shopping Mall/others



ST UHDB(16:9) highlights




full front maintenance

no need maintenance channel, save space LED module, PSU, RX Card can replace in front

Real stable and durable

Hub card design, no additional power/data cables inside. Easy install and save troubles, real stable and durable.

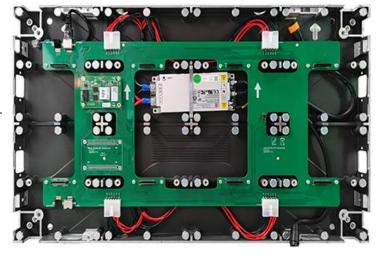

Ultra thin and light weight

Only 63mm thickness and 6.5kg/cabinet. Save transportation cost, convenience for installation.





GOB technology is available(options)

small pixel pitch LED w/o masking, GOB technology can prevent damage from static electricity and moisture, prolong the LED display's lifetime

UHDB(16:9) Specification

| ltem | Fine Pitch UHDB(16:9) Series (indoor fix installation) | | |
|--------------------------|---|----------------|----------------|
| Pixel Pitch | P1.25 indoor | P1.56 indoor | P1.87 indoor |
| LED per pixel | SMD1010 | SMD1212 | SMD1515 |
| Pixel Density(per sqm) | 640000 | 409600 | 284444 |
| Module Dimension(WxH) | 150x168.75mm | 150x168.75mm | 150x168.75mm |
| Module Resolution | 120x135 pixels | 96x108 pixels | 80x90 pixels |
| Scan Rate | 1/45 | 1/48 | 1/30 |
| Cabinet Dimension(WxHxD) | 600x337.5x63mm | 600x337.5x63mm | 600x337.5x63mm |
| Cabinet Resolution | 480x270 pixels | 384x204 pixels | 320x180 pixels |
| Best View Distancing | >1m | >1m | >1m |
| Refresh Rate | 3840Hz | 3840Hz | 3840Hz |
| Viewing Angle(H/V) | 160°/140° | 160°/140° | 160°/140° |
| Cabinet Material | Die-casting | Die-casting | Die-casting |
| Maintenance | Front | Front | Front |
| Single Cabinet Weight | 6.5kgs | 6.5kgs | 6.5kgs |
| Brightness | 600-800nits | 600-800nits | 600-800nits |
| Max Power Consumption | 600w | 600w | 600w |
| Avg Power Consumption | 300w | 300w | 300w |
| Ingress Protection | IP30 | IP30 | IP30 |
| Lifetime(Hrs) | 100,000 | 100,000 | 100,000 |
| Working Temperature | -20°~+60° | -20°~+60° | -20°~+60° |
| Storage Temp/Humidity | -40°/60°; 10%-60%RH | | |

^{*}product spec are for reference only,the final interpretation right of product is reserved by HoliLED



Indoor LED Display
Outdoor LED Display
Customized LED Display
LED for rental using
LED for fix installation

Follow Us







SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:502A,T2 Building,HiPark,Shiyan,Bao'an,Shenzhen,China http://www.holiled.com

sales@holiled.com sales01@holiled.com sales02@holiled.com sales03@holiled.com support@holiled.com