

Indoor P2.6,P3.9  
Outdoor P3.9,P4.8  
500x500mm or 500x1000mm

- Pro AV Rental
- 3D
- light weight
- front/rear
- Magnetic Panels
- fanless
- Modular Design
- Wide Viewing Angle
- 90° Options
- Curving Options

Indoor & Outdoor LED Display for Pro AV rental

Living Broadcasting / AV Production / TV Studio / Events

## R3 plus highlights




Magnesium alloy for AV rental  
**only 6kg/tile Lightweight**

**Front/Rear maintenance**  
LED module use magnet design,  
it can do easy and fast maintenance

### Real stable and durable

Hub card design, no additional power/data cables inside.  
Easy install and no troubles, real stable and durable.

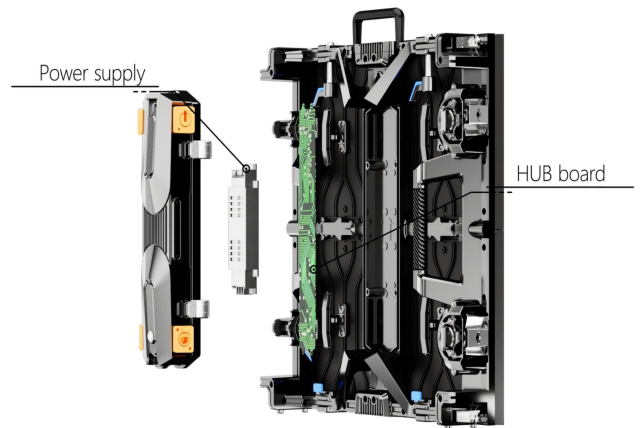

### Anti-collision design

The corner protection cover can protect the LED panel from setup/tear down/transport, let your LED panel always keep better condition than others

### Convex/concave design(options)

Our curve lock system can give you a very smooth curve shape, help you get creative and high quality request AV production



## R3 Plus Specification

Item	R3 Plus (indoor/outdoor rental)			
<b>Pixel Pitch</b>	P2.6 indoor	P3.9 indoor	P3.9 outdoor	P4.8 outdoor
<b>LED per pixel</b>	SMD1515	SMD2121	SMD1921	SMD1921
<b>Pixel Density(per sqm)</b>	147456	65536	65536	43264
<b>Module Dimension(WxH)</b>	250x250mm	250x250mm	250x250mm	250x250mm
<b>Module Resolution</b>	96x96 pixels	64x64 pixels	64x64 pixels	52x52 pixels
<b>Scan Rate</b>	1/24	1/16	1/16	1/13
<b>Cabinet Dimension(WxHxD)</b>	500x500x74mm	500x500x74mm	500x500x74mm	500x500x74mm
<b>Cabinet Resolution(500mm)</b>	192x192 pixels	128x128 pixels	128x128 pixels	104x104 pixels
<b>Best View Distancing</b>	>2m	>3m	>3m	>4m
<b>Refresh Rate</b>	3840Hz	3840Hz	3840Hz	3840Hz
<b>Viewing Angle(H/V)</b>	160°/140°	160°/140°	160°/140°	160°/140°
<b>Cabinet Material</b>	Magnesium alloy	Magnesium alloy	Magnesium alloy	Magnesium alloy
<b>Curve(options)</b>	+/-3/6°	+/-3/6°	+/-3/6°	+/-3/6°
<b>Maintenance</b>	Front/Rear	Front/Rear	Rear	Rear
<b>Single Cabinet Weight</b>	6kgs	6kgs	6.2kgs	6.2kgs
<b>Brightness</b>	800-1200nits	800-1200nits	3500-4500nits	3500-4500nits
<b>Max Power Consumption</b>	480w	480w	700w	700w
<b>Avg Power Consumption</b>	240w	240w	350w	350w
<b>Ingress Protection</b>	IP30	IP30	IP65(F) / IP54(R)	IP65(F) / IP54(R)
<b>Lifetime(Hrs)</b>	100,000	100,000	100,000	100,000

\*product spec are for reference only,the final interpretation right of product is reserved by HoliLED

Indoor LED Display  
Outdoor LED Display  
Customized LED Display  
LED for rental using  
LED for fix installation

## Follow Us



WEBSITE



YOUTUBE



FACEBOOK

## SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:502A,T2 Building,HiPark,Shiyan,Bao'an,Shenzhen,China

<http://www.holiled.com>

[sales@holiled.com](mailto:sales@holiled.com)

[sales01@holiled.com](mailto:sales01@holiled.com)

[sales02@holiled.com](mailto:sales02@holiled.com)

[sales03@holiled.com](mailto:sales03@holiled.com)

[support@holiled.com](mailto:support@holiled.com)