



Indoor SMD P1.25, P1.53, P1.86, P2.0, P2.5, P3

Indoor COB P1.53,P1.86

LED Module Size: 320x160mm

960x480mm(WxH)

640x640mm(WxH)

640x480mm(WxH)


640x320mm(WxH)



Fine Pitch UHDA(4:3) indoor LED Display

**For Airport/Control Room/Shopping Mall/others**

## UHDA(4:3) highlights

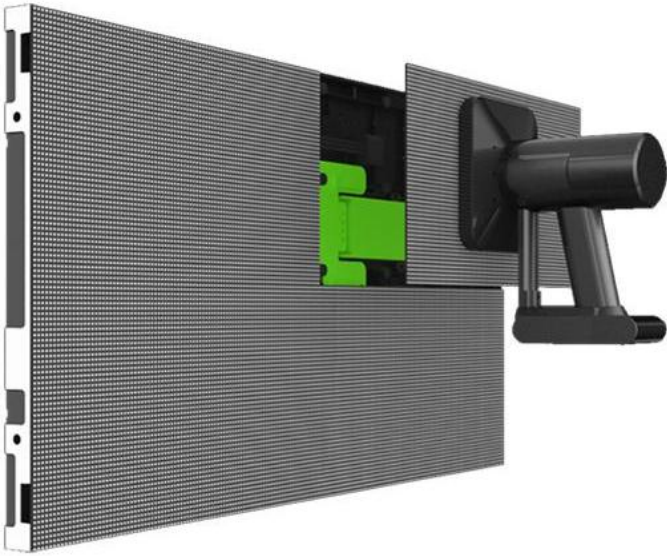

### full front maintenance

no need maintenance channel, save space  
LED module, PSU, RX Card can replace in front

### low cost to upgrade smaller pixel pitch

LED module size is 320x160mm,  
can do P1.2, P1.5, P1.8, P2.0 and P2.5




### ultra thin and light weight

only 60mm thickness and 6.8kg/panel  
can 640x480/320mm size.

### silence work with high precision

high precision Die-casting aluminum cabinet  
real seamless best for Fine Pixel Pitch LED

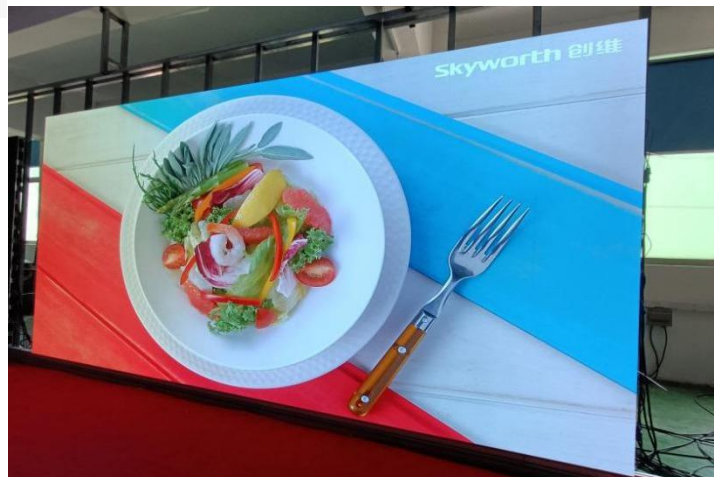

Item	Fine Pitch UHDA(4:3) Series ( indoor fix installation)				
<b>Pixel Pitch</b>	P1.25 indoor	P1.53 SMD <b>P1.53 COB</b>	P1.86 SMD Stock available <b>P1.86 COB</b>	P2.0 SMD Stock available	P2.5 SMD Stock available
<b>LED per pixel</b>	SMD1010	SMD1212	SMD1515	SMD2020	SMD2020
<b>Pixel Density(per sqm)</b>	640000	422600	289050	250000	160000
<b>Module Dimension(WxH)</b>	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm
<b>Module Resolution</b>	256x128 pixels	208x104 pixels	172x86 pixels	160x80 pixels	128x64 pixels
<b>Scan Rate</b>	1/64	1/52	1/43	1/40	1/32 or 1/64
<b>Cabinet Dimension(WxH)</b>	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm
<b>Cabinet Resolution (640x480)</b>	512x384 pixels	416x312 pixels	344x258 pixels	320x240 pixels	256x192 pixels
<b>Best View Distancing</b>	>1m	>1m	>1m	>2m	>2m
<b>Refresh Rate</b>	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
<b>Viewing Angle(H/V)</b>	160°/140°	160°/140°	160°/140°	160°/140°	160°/140°
<b>Cabinet Material</b>	Die-casting	Die-casting	Die-casting	Die-casting	Die-casting
<b>Maintenance</b>	Front	Front	Front	Front	Front
<b>Single Cabinet Weight</b>	6-7kgs	6-7kgs	6-7kgs	6-7kgs	6-7kgs
<b>Brightness</b>	600-800nits	600-800nits	600-800nits	600-800nits	600-800nits
<b>Max Power Consumption</b>	600w	600w	600w	600w	600w
<b>Avg Power Consumption</b>	300w	300w	300w	300w	300w
<b>Ingress Protection</b>	IP30	IP30	IP30	IP30	IP30
<b>Lifetime(Hrs)</b>	100,000	100,000	100,000	100,000	100,000
<b>Working Temperature</b>	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°
<b>Storage Temp/Humidity</b>	-40°/60°; 10%-60%RH				

\*product spec are for reference only,the final interpretation right of product is reserved by HoliLED



1. website



2. facebook



3. sktok



4. youtube

**SHENZHEN HOLILED TECHNOLOGY CO.,LTD**

Add:5F,Building A,ShengDe Lan Industrial Park,  
Kukeng,Guanlan,Shenzhen,China  
<http://www.holiled.com>

[sales@holiled.com](mailto:sales@holiled.com)  
[sales01@holiled.com](mailto:sales01@holiled.com)  
[sales02@holiled.com](mailto:sales02@holiled.com)  
[sales03@holiled.com](mailto:sales03@holiled.com)  
[sales04@holiled.com](mailto:sales04@holiled.com)  
[sales05@holiled.com](mailto:sales05@holiled.com)  
[sales06@holiled.com](mailto:sales06@holiled.com)  
[sales07@holiled.com](mailto:sales07@holiled.com)  
[sales08@holiled.com](mailto:sales08@holiled.com)