

HIDA Series



Indoor SMD P1.97, P2.6, P2.97, P3.91, P4.81

LED Module Size: 250x250mm

1000x500mm(WxH)

750x500mm(WxH)

500x500mm(WxH)

1000x250mm(WxH)

750x250mm(WxH)

500x250mm(WxH)



HIDA indoor LED Display

For Ballroom, Church, Meeting Room, Showroom, Shopping mall etc



HIDA highlights



Front maintenance

The LED Modules, PSU, cables and Receiving card could be 100% front maintained


Fast lock

Cabinet equipped with fast lock, to make sure the seamless, and support fast installation on site.



Multiple cabinet size

Various cabinet size for option, meet different cabinet requirement

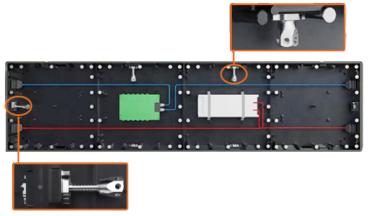

Support 90°

Besides the normal cabinet, 90°cabinet is also available





Item	HIDA Series (fix installation)				
Pixel Pitch	P1.97	P2.6	P2.97	P3.91	P4.81
LED per pixel	SMD1415	SMD1415	SMD1921/ SMD1415	SMD1921	SMD1921
Pixel Density (per sqm)	258,064	147,456	112,896	65,536	43,264
Module Resolution	127×127 pixels	96×96 pixels	84×84 pixels	64×64 pixels	52×52 pixels
Module Dimension (W×H)	250×250mm				
Scan Rate	1/32	1/24	1/21	1/16	1/13
Cabinet Dimension (W×H)	1000×500mm,750×500mm,500×500mm, 1000×250mm,750×250mm,500×250mm				
Best View Distancing	>1.97m	>2.6m	>2.97m	>3.91m	>4.81m
Refresh Rate	3840Hz/7680Hz				
Viewing Angle (H/V)	160°/140°				
Maintenance	Front				
Brightness	700-800nits	700-800nits	700-800nits/ 4500nits	4500nits	4500nits
Lifetime(Hrs)	100,000				

^{*}product spec are for reference only,the final interpretation right of product is reserved by HoliLED









SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:4F,No.5 Building A,HKC Industrial Park, Shiyan,Bao'an,Shenzhen,China http://www.holiled.com

> sales@holiled.com sales01@holiled.com sales02@holiled.com sales03@holiled.com sales04@holiled.com sales05@holiled.com sales06@holiled.com sales07@holiled.com sales08@holiled.com